


## INFRASTRUCTURE

State of the art infrastructure - factory spread over 9000 sq. mtrs. Facility include CNC Laser Cutting, CNC Sheet metal process equipment, online surface treatment and CNC Machining Centre. Quality established as per ISO 9001 Standards.




**SIEGER**


RTS Loop

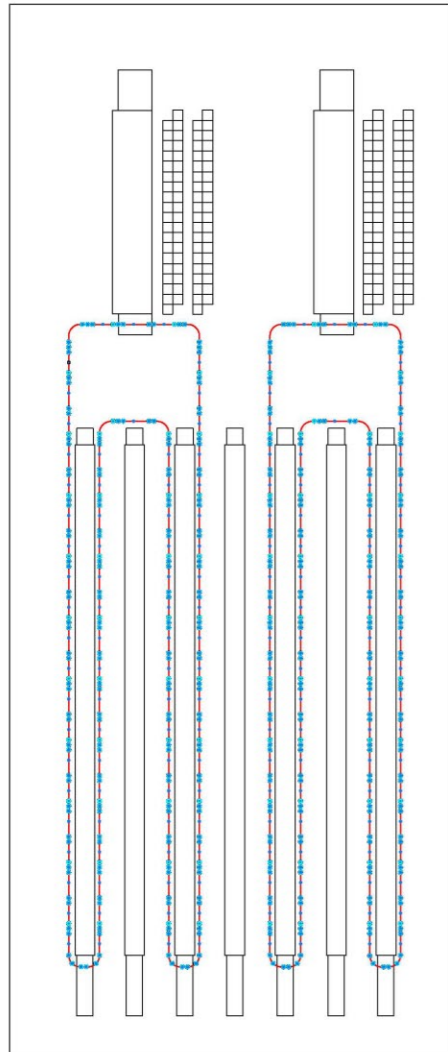

RTS ALFA

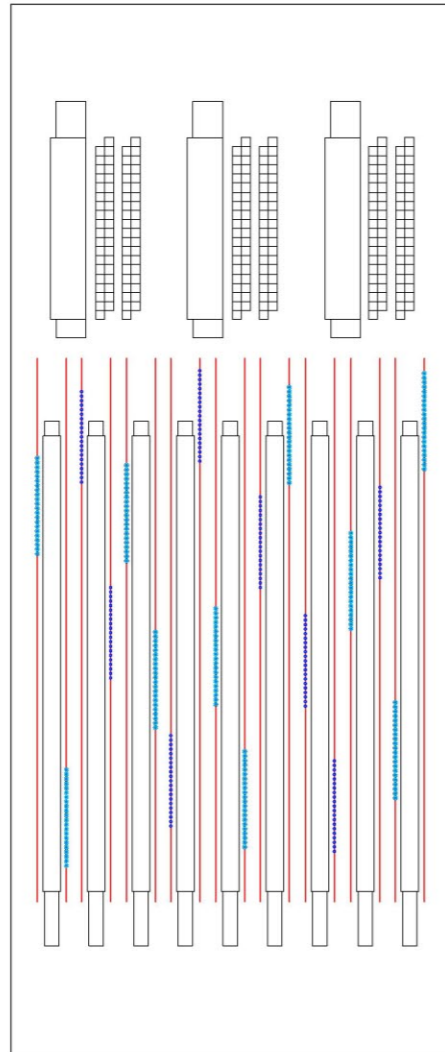

RTS - Auto Manual

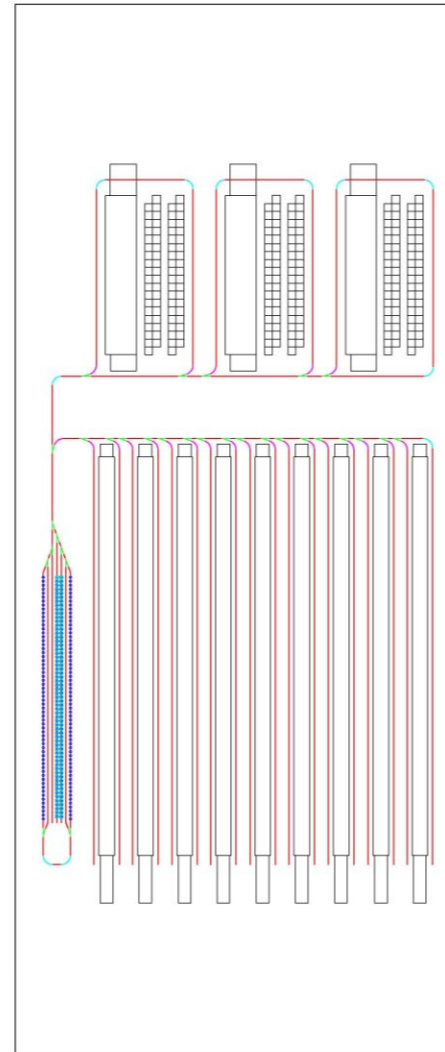

**Roving Transportation System - RTS**

### **SIEGER SPINTECH EQUIPMENTS PVT. LTD.,**

SF No.49, Annur Road, Arasur Post, Coimbatore - 641 407, India.


Ph : +91 422 2361400 Fax : +91 422 236 1401 M : +91 98947 51798

E-mail : [marketing@siegerglobal.net](mailto:marketing@siegerglobal.net), [info@siegerglobal.net](mailto:info@siegerglobal.net), [service@siegerglobal.net](mailto:service@siegerglobal.net)

Web : [www.siegerglobal.net](http://www.siegerglobal.net)

## Roving Transportation System - RTS

**IEGER** - An established solution provider for textile mills with state of art manufacturing facilities is tied up with AKE Automation, Germany to offer proven automation solution for spinning mills.

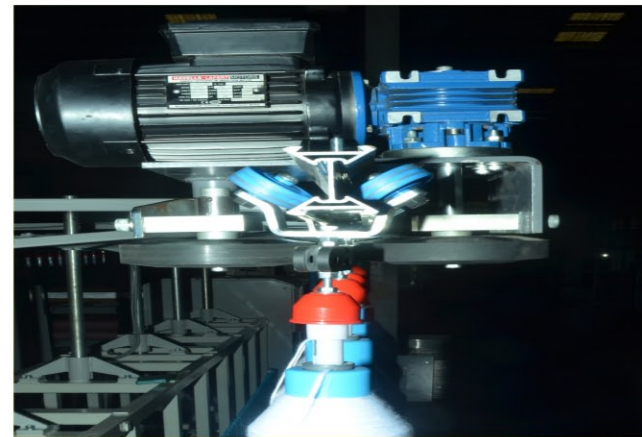

## RTS - Rails

The heart of the RTS system is a sturdy aluminium rail. The guide rollers are with angular inclination, which guides and bears the load. The rail is tapered to avoid accumulation of dust and fluff and enhances self cleaning. The rails are of interlocking design which ensures stability of the rails and thereby smooth operation.



## RTS - Elevation

Sturdy track and modular drive arrangements makes transport from different floor level possible. Full bobbin transport with heavy loads is effortlessly transported to different floors.

## RTS - Lay Out

Fully automatic, semi auto and manual system configuration is available. Layout adaptable for random and batch loading. Automatic roving bobbin stripper can be integrated to clean the bobbin while being transported from ring frame to speed frame. Train with different configuration with rotating or stationery holders to enhance automation possibilities.



## RTS - Supports

Modular design and variety of supports creates numerous configuration to suit all types of mill layout specifically for existing mills.



## RTS - Switches & Diverters

Automatic (or) manual switches with 2/3 way systems. The switches are mounted on sturdy precisely machined aluminium plate. The switches are sturdy for long life operation.



## RTS - Buffer

Rows of parallel buffers are located at vantage points so that material is available at ring frame within the shortest possible time. Dense buffering helps to reduce fluff accumulation. Buffers with automatic diverters ensure different material stored and directed with precision to pre designated ring frames.



## ROVEMASTER - Inline

- Fully contained unit with automatic bobbin removal, stripping, opening and re insertion in the line.
- Variable unwinding speed to suit various material and twist parameters.
- Can be adopted for a variety of roving transport systems from other makes for different bobbin sizes.

